
# 继电器类

## JSZ4系列 时间继电器




#### 1型号及其含义




#### 2 主要技术数据


JSZ4–YA	JSZ4–NA
通电延时或通电延时带瞬动	
延时2转换或延时1转换、瞬时1转换(通过开关可选	
Ue/le: AC-15 220V/0.75A, 380V/0.47A; DC-13 2	220V/0.27A; Ith: 5A
A: 1s/10s/1min/10min B: 3s/30s/3min/30min C: 6s/60s/6min/60min D: 1min/10min/1h/10h E: 3min/30min/3h/30h F: 6min/60min/6h/60h	
AC50Hz 36V、110V、220V、380V DC24V(其它电	B压可定制)
1 × 10 <sup>5</sup>	
1×10°	
≤10%	
–5°C~+40°C	
	通电延时或通电延时带瞬动 延时2转换或延时1转换、瞬时1转换(通过开关可选 Ue/le: AC-15 220V/0.75A, 380V/0.47A; DC-13 2 A: ls/10s/lmin/10min 3: 3s/30s/3min/30min C: 6s/60s/6min/60min D: lmin/10min/1h/10h E: 3min/30min/3h/30h F: 6min/60min/6h/60h AC50Hz 36V、110V、220V、380V DC24V(其它与 x 10° ≤ 10%

#### 3接线图

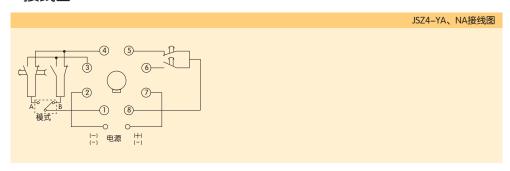

### 4 外形及安装尺寸





# 继电器类

